

### DESCRIPTION

MT7950H is a primary-side controller for AC-DC LED lighting. It operates in constant current control mode and works in discontinuous conduction mode, suitable for flyback converter under universal input.

MT7950H adopts primary side sensing and regulation technology, no secondary side feedback circuit is needed. Further, the loop compensation components are also eliminated while maintaining system stability. Low component counts and low BOM cost are achieved.

By using Maxic proprietary current regulation method, the MT7950H achieves  $\pm 3\%$  accuracy of LED current along with excellent line regulation and load regulation.

MT7950H provides plenty of protections, such as LED short circuit protection, LED open circuit protection, over-temperature protection, VDD over voltage protection, VDD under voltage lock-out, etc.


### FEATURES

- 85V to 265V AC line voltage range
- Primary side sensing and regulation, no need of secondary side feedback
- High precision constant LED current ( $\pm 3\%$ )
- Cycle-by-cycle peak current control
- LED short-circuit/open circuit protection
- VDD under voltage lock-out protection
- VDD over voltage protection
- Over temperature protection
- Built-in leading edge blanking (LEB)
- Extremely minimum external components
- Available in SOT23-5 package

### APPLICATION

- E14/E27/PAR30/PAR38/GU10 LED lamp
- LED lighting application
- General purpose constant current source

### Typical Application Circuit

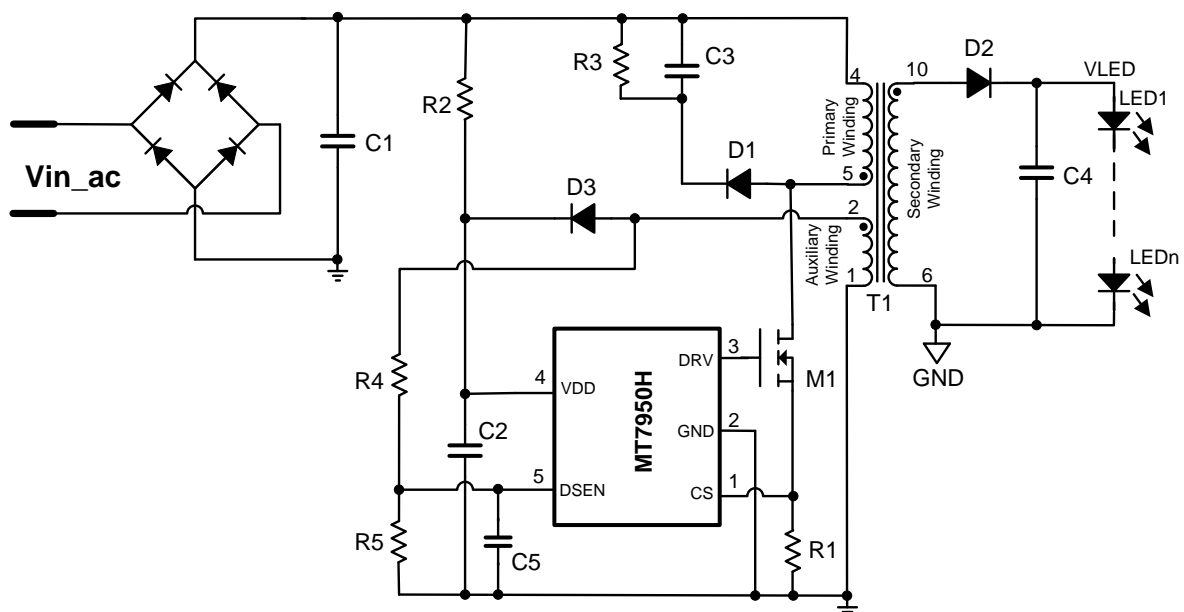

### ABSOLUTE MAXIMUM RATINGS

VDD	-0.3V to 20V
DSEN	-0.3V to 6V
DRV	-0.3V to 20V
CS	-0.3V to 6V
Storage Temperature	-55°C to 150°C
Junction Temperature (Tj)	150°C

### Recommended operating conditions

Supply voltage	7.5V to 16V
Operating Temperature	-40°C to 105°C


### Thermal resistance<sup>①</sup>

Case to ambient (R <sub>θCA</sub> )	145°C/W
-------------------------------------	---------


**Note:**

- ① *R<sub>θJA</sub> is measured in the natural convection at TA = 25°C on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard. Test condition: Device mounted on 2" X 2" FR-4 substrate PCB, 2oz copper, with minimum recommended pad on top layer and thermal vias to bottom layer ground plane.*

### PIN CONFIGURATIONS

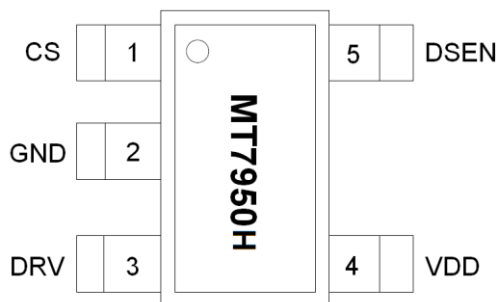

### Chip Mark

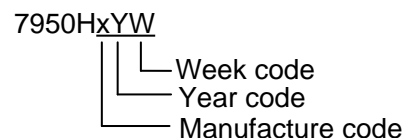

### PIN DESCRIPTION


Name	Pin No.	Description
CS	1	Current sense pin. A sense resistor connected between CS and GND pin.
GND	2	Ground
DRV	3	Gate drive output for power N-MOSFET.
VDD	4	Power Supply.
DSEN	5	The voltage feedback from auxiliary winding. Connected to a resistor divider from auxiliary winding reflecting output voltage. For further noise immunity, parallel a 22pF capacitor to GND.

### ELECTRICAL CHARACTERISTICS

(Test conditions:  $V_{DD}=12V$ ,  $T_A=25^{\circ}C$  unless otherwise stated.)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Start-up &amp; Power supply (VDD Pin)</b>						
$I_{START}$	Start-up Current			25	50	$\mu A$
UVLO	Lower Threshold Voltage of $V_{DD}$	$V_{DD}$ Pin ramp down from 18V	6.6	7.2	7.5	V
$V_{START}$	Start-up Voltage	$V_{DD}$ Pin ramp up from 0V	15	16	17	V
$V_{DD-CLAMP}$	VDD clamp voltage	$I_{DD}=10mA$	18.6	19.5	20.4	V
<b>Operation Current</b>						
$I_Q$	Operation current	$F_s=40kHz$		1.5		mA
<b>Current Sense (CS Pin)</b>						
$V_{CS-TH}$	Threshold Voltage of Peak Current Protection		487	500	513	mV
LEB1	Leading Edge Blanking at CS Pin			500		nS
<b>Auxiliary Winding Detection (DSEN Pin)</b>						
$V_{OV-TH}$	The over voltage threshold at DSEN pin		2.15	2.3	2.5	V
LEB2	The Leading Edge Blanking at DSEN Pin			2.0		$\mu S$
<b>Over Temperature Protection</b>						
OTP	Over temperature protection threshold			155		$^{\circ}C$
	Over temperature protection release thysteresis			20		$^{\circ}C$
<b>Driver Stage (DRV Pin)</b>						
$T_F$	Falling Time	$C_L=0.5nF$ , DRV Pin Falls from $V_{DD}$ to 0V		50		nS
$T_R$	Rising Time	$C_L=0.5nF$ , DRV Pin Rises from 0V to $V_{DD}$		500		nS
$I_{source}$	The maximum driver output current	$V_{CC}=12V$		540		mA
$I_{sink}$	The maximum driver Input current	$V_{CC}=12V$		700		mA

### BLOCK DIAGRAM

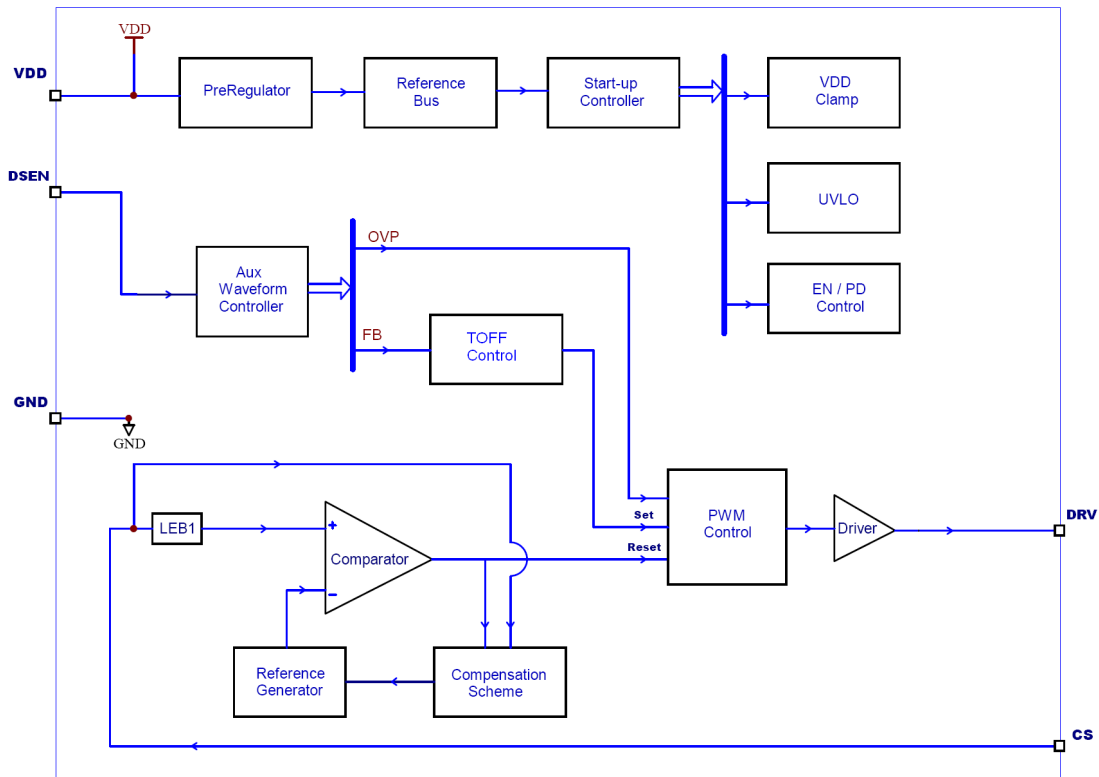


### APPLICATION INFORMATION

MT7950H is a high performance power switch specially designed for LED lighting. It works in Discontinuous Conduction Mode (DCM). MT7950H uses Maxic proprietary constant current regulation and compensation technology to achieve accurate LED current without opto-coupler and secondary side feedback circuit, and minimizes the external component count, lower the total BOM cost.

#### Start Up

During start-up process, VDD is charged through a start-up resistor. As VDD reaches 16V, the control logic starts to work, and the power MOSFET begins to switch, as show in Fig.1. The power supply is taken over by the auxiliary winding once the voltage of this winding is high enough.

MT7950H will shut down if VDD goes below 7.2V (UVLO threshold voltage).

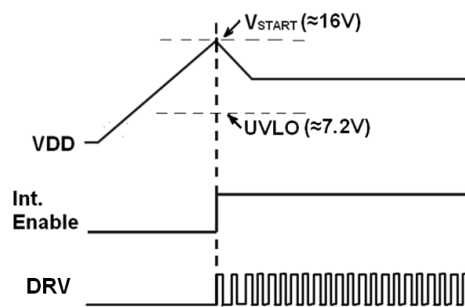

**Fig.1 Start up sequence**

#### Constant Current Control and Output Current Setup

Cycle-by-cycle current sense is offered in MT7950H, the CS is connected to the current sense comparator, and the voltage on CS is compared with the internal 500mV reference voltage, the MOSFET is turned off when the voltage on the CS reaches the threshold. The

comparator also includes a 500nS leading edge blanking time to block the transient noise as the power switch just turned on.

The primary side peak current is given by:

$$I_{P\_PK} = \frac{500}{R_{CS}} (mA)$$

where  $R_{CS}$  is the peak current sensing resistor, i.e. the resistor R1 in the application circuit in page 1.

The current in LED can be calculated by the following equation:

$$I_{LED} = \frac{I_{P\_PK}}{4} \times \frac{N_P}{N_S} = \frac{500}{4 \times R_{CS}} \times \frac{N_P}{N_S} (mA)$$

where  $N_P$  is the turns of the primary winding,  $N_S$  is the turns of the secondary winding,  $I_{P\_PK}$  is the primary side peak current. Shown in the above equation, the output current is determined by the turns ratio of the transformer and the current sense resistor value, insensitive to the inductance of the transformer.

### Switching Frequency

MT7950H is designed to operating in discontinuous conduction mode and no external loop compensation is needed to maintain system stability. The maximum duty cycle is limited to 42%. It's highly recommended to limit the maximum switching frequency less than 100kHz and the minimum switching frequency more than 20kHz.


The switching frequency can be set by formula:

$$f_{SW} = \frac{N_P^2 \times V_{LED}}{8 \times N_S^2 \times L_p \times I_{LED}}$$

where,  $N_P$  is the turns of the primary winding,  $N_S$  is the turns of the secondary winding,  $L_p$  is the transformer primary winding inductance. Customer should set the switching frequency between 40kHz to 80kHz through properly design transformer parameters.

### Auxiliary Winding Feedback and Sensing

MT7950H detects the secondary side output current through the feedback of the auxiliary winding. DSEN pin connect to auxiliary winding through an external resistor divider. To block the switching noise, a 2uS leading edge blanking time is embedded inside the chip. Refer to Fig.2. MT7950H features over-voltage protection (OVP), LED open circuit protection, turn-off time control functions. Those functions are triggered by sensing the auxiliary winding waveform information through DSEN pin.

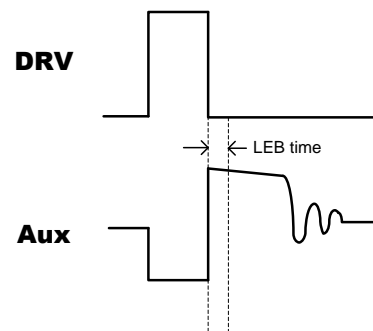

**Fig.2 Auxiliary Signal Sensing**

### Over-voltage (LED open circuit) Protection

MT7950H is implemented with over-voltage protection scheme: If DSEN pin's voltage is detected above pre-determined threshold (2.3V) for four times, MT7950H turns off the PWM switching signal, and VDD voltage gradually drops to UVLO threshold, and the system will be re-started. The threshold voltage of over-voltage protection  $V_{OUT\_OV}$ , can be easily defined as (refer to the application circuit in page 1):

$$V_{OUT\_OV} = 2.3 \times \left(1 + \frac{R4}{R5}\right) \times \frac{N_S}{N_a} - V_{D2}$$

where  $N_S$  is the secondary winding,  $N_a$  is auxiliary winding,  $V_{D2}$  is the forward bias of the secondary side rectifier diode.

In addition, if VDD pin's voltage exceeds 19.5V, the clamp circuit in MT7950H wakes up, clamps VDD voltage at 19.5V. It is highly recommended to set up the VDD voltage between 7.5V and 16V

by designed a proper  $N_a$  to  $N_s$  ratio of the transformer.

**Over-current Protection**

MT7950H immediately turns off the power MOSFET once the voltage at CS pin exceeds 500mV. This cycle by cycle current limitation scheme prevents the relevant components, such as power MOSFET, transformer, etc. from damage.

**PCB Layout**

The following rules should be followed in MT7950H PCB layout:

***Bypass Capacitor***

The bypass capacitor on VDD should be as close

as possible to the VDD pin.

***Ground Path***

The power ground path for current sense should be short, and the power ground path should be separated from small signal ground path before the negative of the bulk capacitor.


***The Area of Power Loop***

The area of main current loop should be as small as possible to reduce EMI radiation, such as the primary current loop, the snubber circuit and the secondary rectifying loop.

## PACKAGE INFORMATION

Surface mounted, 5 pin package

Package outline

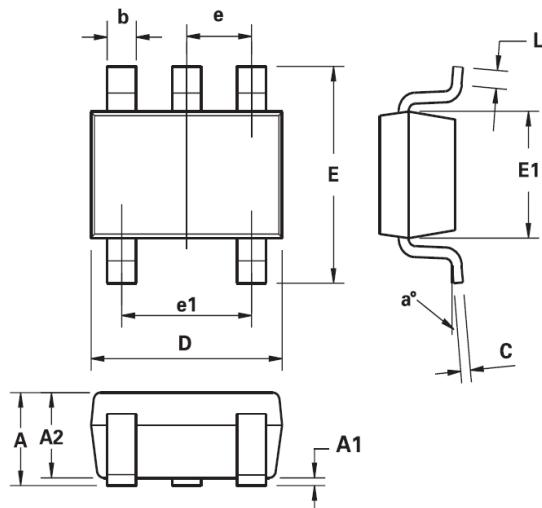

DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.45	0.0354	0.0570
A1	0.00	0.15	0.00	0.0059
A2	0.90	1.30	0.0354	0.0511
b	0.20	0.50	0.0078	0.0196
C	0.09	0.26	0.0035	0.0102
D	2.70	3.10	0.1062	0.1220
E	2.20	3.20	0.0866	0.1181
E1	1.30	1.80	0.0511	0.0708
e	0.95 REF		0.0374 REF	
e1	1.90 REF		0.0748 REF	
L	0.10	0.60	0.0039	0.0236
a°	0°	30°	0°	30°

**Note:** Controlling dimensions are in millimeters. Approximate dimensions are provided in inches

### Important Notice

- Maxic Technology Corporation (Maxic) reserve the right to make correction, modifications, enhancements, improvements and other changes to its products and services at any time and to discontinue any product or service with notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to Maxic's terms and conditions of sale supplied at the time of order acknowledgement.
- Reproduction, copying, transferring, reprinting this paper without Maxic's written permission is prohibited.
- Maxic is not responsible or liable for customer product design by using Maxic components. To minimize the risks and associated with customer products and applications, customers should provide adequate design and operating safeguards and consult Maxic's sales department.



**For detail products information and sample requests, please contact:**

**Maxic Technology Corporation (Beijing Office)**

1006, Crown Plaza Office Tower, No106, ZhiChun Road, Hai Dian District, Beijing, China, 100086

Tel: 86-10-62662828

Fax: 86-10-62662951

**Maxic Technology Coporation (Shenzhen office)**

Room 1115, Qinghai Building, No.7043 North Ring Road, Futian District, Shenzhen, P.C. 518000

Tel: 86-755-83021778

Fax: 86-755-83021336

**Maxic Technology Corporation (Suzhou Office)**

B-503, #3 Chuangye Park, 328 Xinghu Street, Indurial Park, Suzhou, 215021

Tel: 86-512-62958262

Fax: 86-512-62958262

**Maxic Technology Corporation(Indian office)**

50-B,Bhatia Colony,Ballabgarh-121004,Faridabad(INDIA)

**E-mail:** [India@maxictech.com](mailto:India@maxictech.com)

Web: [www.maxictech.com](http://www.maxictech.com)

**E-mail:** [sales@maxictech.com](mailto:sales@maxictech.com), [info@maxictech.com](mailto:info@maxictech.com)