

ABSOLUTE MAXIMUM RATINGS

| | |
|---|----------------|
| VDD Pin Voltage | -0.3V to 30V |
| Drain Pin Voltage | -0.3V to 550V |
| COMP/CS/DSEN Pins Voltage | -0.3V to 6V |
| Lead Temperature (soldering, 10 sec.) | 260°C |
| P _{DMAX} (maximum power consumption) | 0.8W |
| Storage Temperature | -55°C to 150°C |
| Junction Temperature (Tj) | 150°C |


RECOMMENDEDE OPERATING CONDITIONS

| | |
|-------------------------------------|--|
| Supply voltage | 7.2V to 12V |
| Operating Temperature (Environment) | -40°C to 105°C |
| Output Power | ≤ 9W @ ≤90°C (Environment temperature) |

THERMAL RESISTANCE

| | |
|---|---------|
| Junction to ambient (R _{θJA}) | 128°C/W |
|---|---------|

PIN CONFIGURATIONS

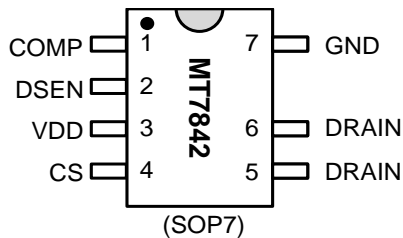

Chip Mark

MT7842
X YY WW XX
 ↳ Manufacture code
 ↳ Week code
 ↳ Year code
 ↳ Manufacture code

PIN DESCRIPTION


| Name | Pin No. | Description |
|-------|---------|---|
| COMP | 1 | Internal EA's output pin. Connect a capacitor to ground for frequency compensation. |
| DSEN | 2 | Feedback pin for inductor zero current crossing detection. |
| VDD | 3 | Power Supply pin. |
| CS | 4 | Source of internal MOSFET, and Current Sense pin. |
| DRAIN | 5,6 | Drain of internal MOSFET. |
| GND | 7 | Ground pin. |

ELECTRICAL CHARACTERISTICS

(Test conditions: V_{DD}=12V, T_A=25°C unless otherwise stated.)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------------------|---|--|-----|-----|-----|------|
| Start-up (VDD Pin) | | | | | | |
| V _{STP} | Start-up Voltage | VDD Ramp-up from 0V | | 12 | | V |
| UVLO | Under Voltage Lockout | VDD Ramp-down from (V _{STP} +1V) | | 7.2 | | V |
| I _{STP} | Start-up Current | VDD=12V | 20 | 30 | 50 | μA |
| V _{DD_OP} | VDD operation voltage | | | 12 | | V |
| Power Supply Current | | | | | | |
| I _Q | Quiescent Current | | | 400 | | uA |
| Control Loop (DSEN Pin) | | | | | | |
| V _{REF-FB} | Voltage Reference for Feedback Loop | Close the Feedback Loop | 196 | 200 | 204 | mV |
| SCP | Threshold of Short Circuit Protection at DSEN Pin | | 350 | 400 | | mV |
| OVP | Over Voltage Protection of DSEN Pin | | | 3.2 | 3.4 | V |
| LEB1 | Leading Edge Blank for DSEN Pin | | | 2 | | us |
| MinT | Minimum Switching Period | | | 10 | | us |
| Current Sense Pin (CS Pin) | | | | | | |
| OCP | Threshold of Over Current Protection at CS Pin | | | 1.4 | | V |
| LEB2 | Leading Edge Blank for CS Pin | | | 300 | | ns |
| Thermal Protection | | | | | | |
| T _{Trig} | Temperature compensation trigger point | | | 150 | | °C |
| Internal MOSFET (DRAIN Pin) | | | | | | |
| R _{on} | Internal MOSFET turn-on resistance | V _{GS} =10V/I _{DS} =1.0A | | 5.5 | | Ω |
| BV _{DSS} | Breakdown voltage | V _{GS} =0V/I _{DS} =250uA | 550 | | | V |

BLOCK DIAGRAM

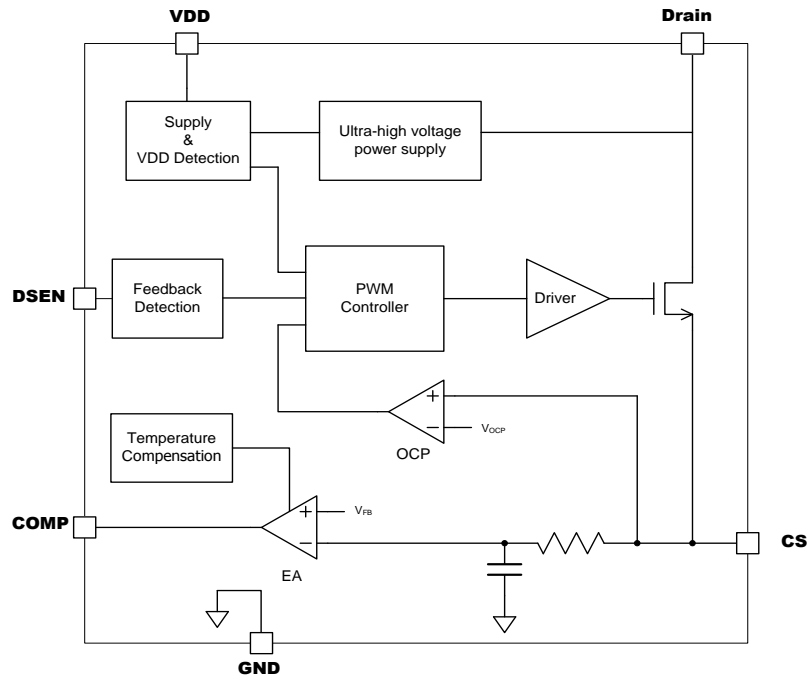

APPLICATION INFORMATION

The MT7842 integrates power factor correction function and works in Quasi-Resonant Mode (QRM). The LED current can be accurately regulated through sensing the inductor current signal.

Averaged Current Control

The MT7842 accurately regulates LED current through sensing the inductor current signal. The LED current can be easily set by:

$$I_{LED} = \frac{V_{FB}}{R_S}$$

Where V_{FB} (=200mV) is the internal reference voltage and R_S is an external current sensing resistor (R_S is the R1 in circuit in page1).

Start Up and High Voltage Power Supply

MT7842 integrates ultra-high voltage power supply circuit, the VDD directly gets the power from the drain pin (Pin5&6). During start-up, the

capacitor at VDD is charged through the internal ultra-high voltage power supply circuit. The internal control logic starts to work when VDD reaches 12V. The COMP pin is, therefore, pre-charged during this process. The internal control loop is established. Once the voltage of COMP reaches 1.4V, the whole system works in normal operation mode.

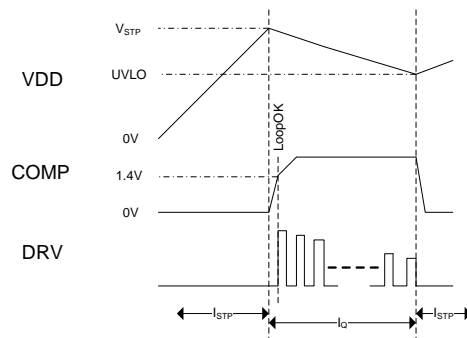


Fig.1 Start up sequence

As the VDD goes below 7.2V, the system is considered to be UVLO, the PWM signal of DRV goes low, and the voltage of COMP is discharged

to 0V. The detailed start-up sequence is shown in Fig. 1.

When the system works in normal operation, the MT7842 controls the internal ultra-high voltage power supply circuit to charge the VDD capacitor. The circuit stops to provide power once the VDD voltage exceeds 12V, and resumes provide power as the VDD voltage lower than 11.5V. So the VDD voltage keeps in about 12V as the system works in normal operation.

Auxiliary Sensing

The voltage waveform of the inductor is sensed during PWM OFF period for switching logic control, over-voltage protection (OVP), short-circuit protection (SCP), etc.

The DSEN pin senses the inductor voltage through a resistor divider. The sampling strobe window is 2us LEB (Leading Edge Blanking) time right after the DRV signal goes low for better noise immunity, as shown in Fig. 2.

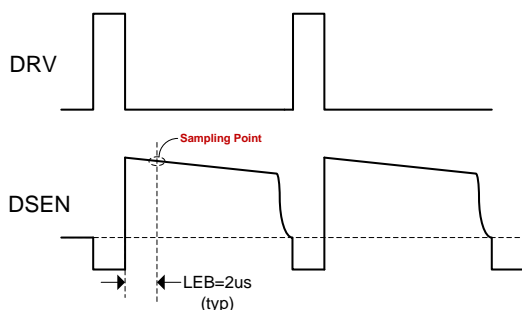


Fig.2 Auxiliary Signal Sensing

Hiccup Mode

Once detected any fault conditions, such as, over-voltage (OV), short-circuit (SC) conditions, the MT7842 goes into hiccup mode. PWM signal is turned off. The chip quiescent current drops lower (about 100uA). After about 240ms, the internal ultra-high voltage power supply circuit stops providing power to VDD. VDD is therefore discharged by the MT7842 itself consumption. Then VDD continues to drop below UVLO threshold. A start-up sequence is initiated.

If the fault conditions are removed, the LED driver goes back to normal.

The hiccup mode keeps the system at low power dissipation state during fault conditions, enhancing system reliability.

Over-voltage Protection

The MT7842 integrates Over Voltage Protection function. If the DSEN voltage exceeds 3.2V three times accumulatively during PWM OFF period (Refer to “Auxiliary Sensing”), the MT7842 gets in Hiccup mode to protect the system and lower the power consumption. The threshold of Over Voltage Protection for LED can be set as following (refer to the application circuit in page 1):

$$V_{OUT_OV} = 3.2 \times \left(1 + \frac{R2}{R3}\right)$$

Short-circuit Protection

The short-circuit protection is triggered if the DSEN voltage is detected below 400mV during OFF period for a continuous time of 5 to 10ms. The MT7842 gets into hiccup mode.

Over-current Protection


The MT7842 immediately turns off the power MOSFET once the voltage at CS pin exceeds 1.4V. This cycle by cycle current limitation scheme prevents the relevant components, such as power MOSFET, inductor, etc. from damage.

Temperature Compensation

When the Junction Temperature reaches 150°C, the compensation circuit starts to reduce output current along with the temperature increasing. As the junction temperature drops below 150°C, the output current back to normal level. This thermal fold back scheme prevents the system goes into thermal runaway.

PACKAGE INFORMATION

SOP-7 PACKAGE OUTLINE AND DIMENSIONS

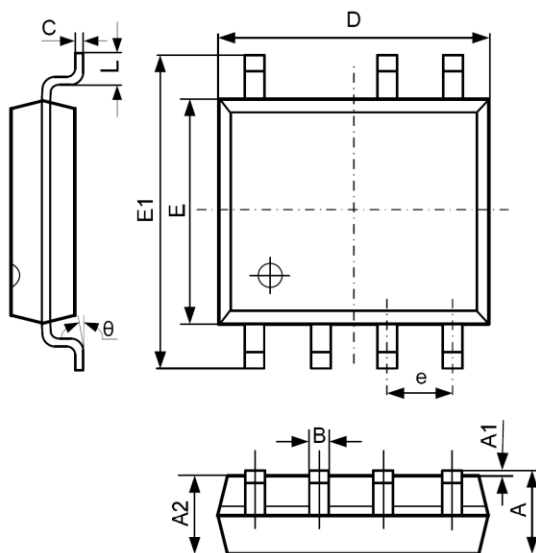

| SYMBOL | DIMENSION IN MILLIMETERS | | DIMENSION IN INCHES | |
|--------|--------------------------|-------|---------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.350 | 1.750 | 0.053 | 0.069 |
| A1 | 0.100 | 0.250 | 0.004 | 0.010 |
| A2 | 1.350 | 1.550 | 0.053 | 0.061 |
| B | 0.330 | 0.510 | 0.013 | 0.020 |
| C | 0.190 | 0.250 | 0.007 | 0.010 |
| D | 4.700 | 5.100 | 0.185 | 0.201 |
| E | 3.800 | 4.000 | 0.150 | 0.157 |
| E1 | 5.800 | 6.300 | 0.228 | 0.248 |
| e | 1.270 TYP | | 0.050 TYP | |
| L | 0.400 | 1.270 | 0.016 | 0.050 |
| theta | 0° | 8° | 0° | 8° |

Important Notice

- Maxic Technology Corporation (Maxic) reserve the right to make correction, modifications, enhancements, improvements and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to Maxic's terms and conditions of sale supplied at the time of order acknowledgement.
- Reproduction, copying, transferring, reprinting this paper without Maxic's written permission is prohibited.
- Maxic is not responsible or liable for customer product design by using Maxic components. To minimize the risks and associated with customer products and applications, customers should provide adequate design and operating safeguards and consult Maxic's sales department.